

ARKIMEDE 41 - DECKING | SELF-LEVELING




INDEX

- 1. Code registry
- 2. Description
- 3. Use
- 4. Fields of use
- 5. Load test
- 6. Technical specification

1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg. / Pallet
TER09-1193/1A	ARKIMEDE 41 Self-leveling for Decking	from 41 to 66	0,358	30 pz. / 1.350 pcs.

MATERIAL Made of PP (polypropylene).

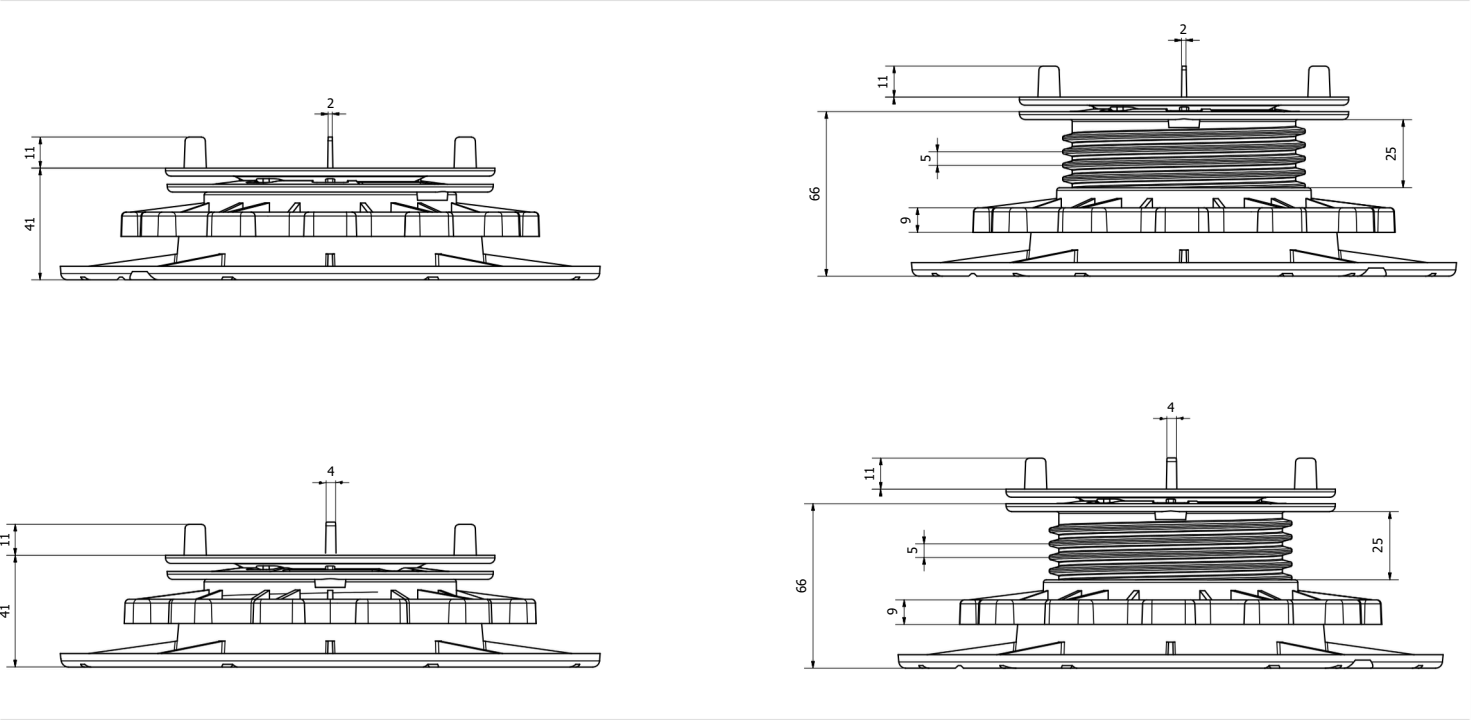

ARKIMEDE 41 - DECKING | SELF-LEVELING

2. DESCRIPTION

Arkimede 41 Self-leveling is the perfect solution for you raised paving or decking.

This product combines the flexibility and the extremely easy-to-use attitude of the Arkimede line (with fixed head) with the plus of a self-leveling head (for slopes from 0 to 5%).

It is adjustable in height from 41 to 66mm (25, 50 and 100 mm extensions excluded) and it can be matched with all Arkimede 35 accessories.

The base allows the correct water outflow.

3. USE

Arkimede 41 telescopic support can be used in outdoor areas, terraces, shared flooring.

With extensions it is possible to extend the fee of the support.

Operating temperature: from - 40 ° C to + 80 ° C.


4. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans

5. LOAD TEST

Code	Dimension	Max load [N]
TER09-1193/1A	h = 41-66 mm	10.409

A punch of 150 mm diameter was used to carry out the test.

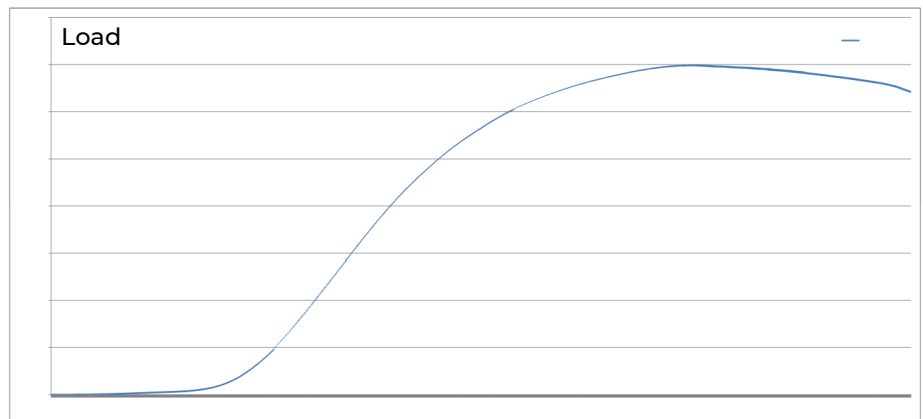

6. TECHNICAL SPECIFICATION

Code	Description	Unity	Price
Dak.O.TER09.1193/x	Supply and installation of self-leveling telescopic support for decking in height from 41 to 66 mm Dimensions: height adjustable from 41 to 66, 4 mm thickness spacer tabs self-leveling head Made of PP (polypropylene) Used in external areas, terraces, shared flooring ..	pcs.	-
Dak.O.TER09.1193/1A	1 tab.....	pcs.	-