

ARKIMEDE 60 - DECKING





INDEX

- 1. Code Registry
- 2. Description
- 3. Use
- 4. Fields of use
- 5. Load test
- 6. Technical specification

1. CODE REGISTRY


Code	Description	Dimension (mm)	Weight (kg)	Pkg. / Pallet
TER09-1163/1A	ARKIMEDE 60-Decking	from 60 to 115	0,24	30 pcs. / 450 pcs.

MATERIAL Made of PP (polypropylene).

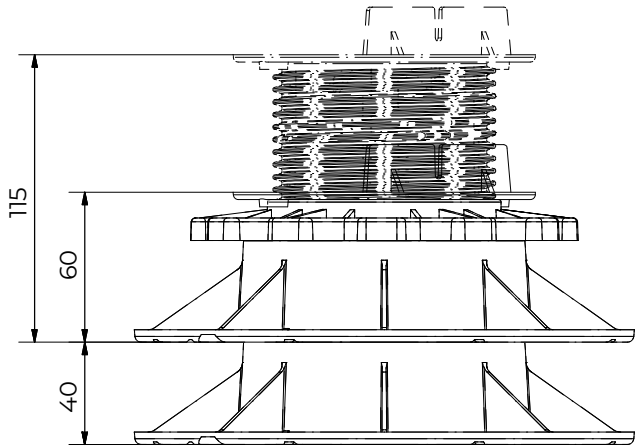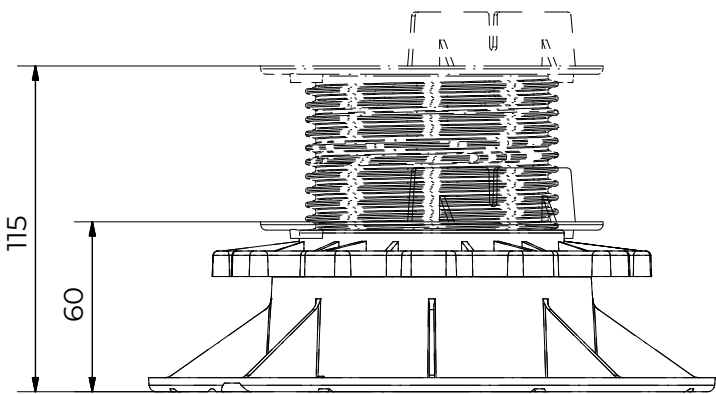

Each base has a special bottom shape that allows to be stack on another base.

ARKIMEDE 60 - DECKING

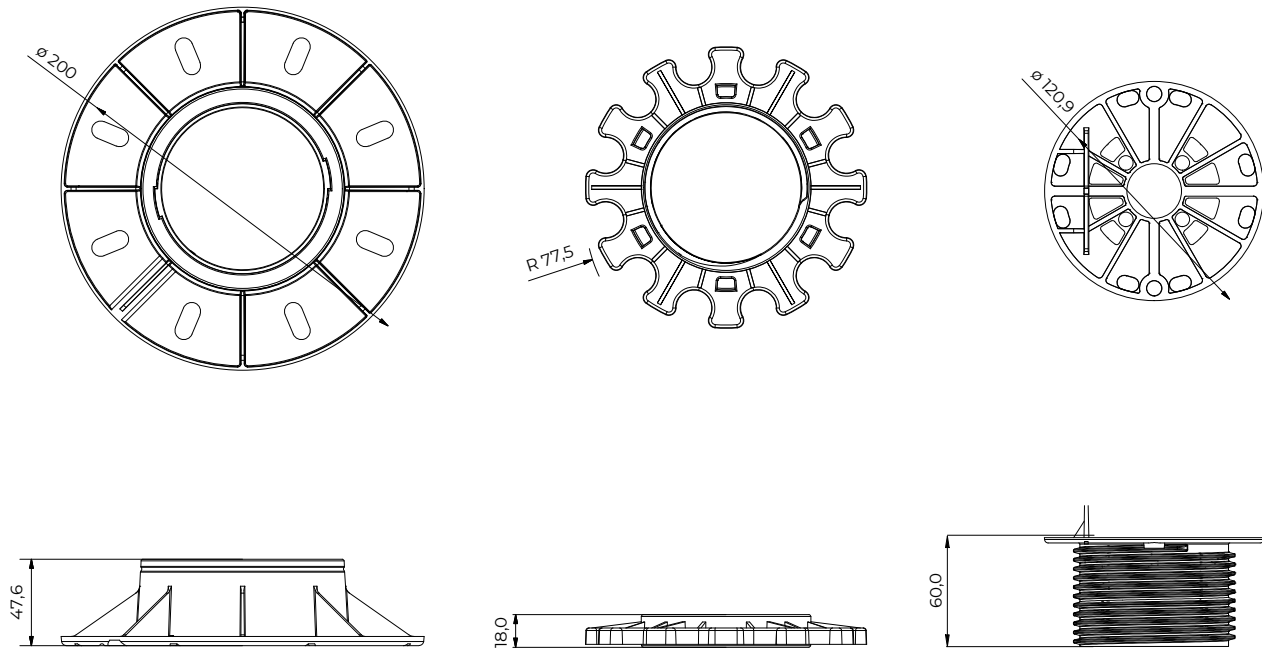

2. DESCRIPTION

Arkimede 60 support with adjustable height starting from 60 mm.
 Base laying surface: 314 cm². Head diameter: 120 mm with a laying surface of 113 cm².
 • Box composed by the base, rotating ring and head with 1 tab for joists.

The base allows the correct water drainage.
 • Extension h. 50 and 100 are available as an optional.


3. USE

Used in external areas, terraces, pavements.

Operating temperature: from - 40 ° C to + 80 ° C.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

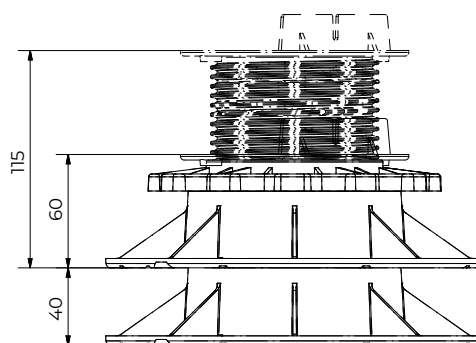

TER09-1163/1A

TER09-1163/P40


ARKIMEDE 60 - DECKING

5. LOAD TEST

TEST 1

Code	Dimension	Max. Load [N]
TER09-1163/1A	h = 1120 mm	9.033

A punch of 150 mm diameter was used to carry out the test.

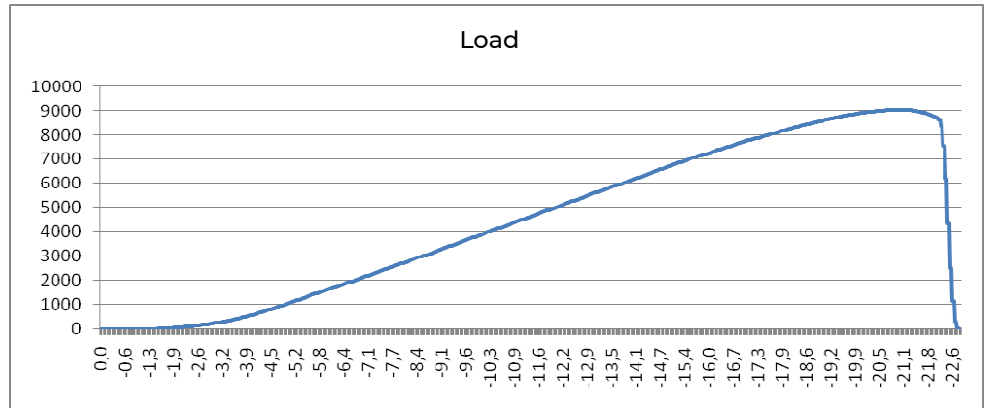


Maximum Load	9.033 N
Bend at Maximum Load	21,0 mm

TEST 2

Code	Dimension	Max. Load [N]
TER09-1163/1A	h = 1100 mm	10.467

A punch of 150 mm diameter was used to carry out the test.

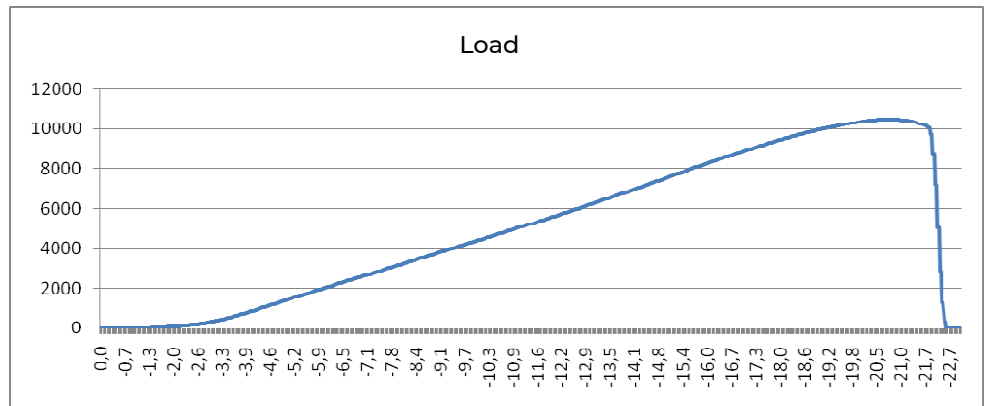

Maximum Load	10.467 N
Bend at Maximum Load	20,7 mm

6. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.TER09-1163/x	Supply and installation of ARKIMEDE 60 - Decking support with adjustable height starting from 60 mm. Base laying surface: 314 cm². Head diameter: 120 mm with a laying surface of 113 cm². Available versions: • Box composed by the base, rotating nut and head with 1 tab for joists. The base allows the correct water drainage. Made of PP (polypropylene). Used in external areas, terraces, pavements.	pcs.	-
Dak.O.TER09-1163/1A	1 tab.....	pcs.	-